

TUMBLE DRYERS

WHEN INVESTING MEANS SAVING

DD28 GOLD
DD35 GOLD

FEATURES

- Construction in grey skinplate, stainless steel look.
- Big loading door (opening of 180°).
- Transmission by pulley and belt, with inverter.
- ENERGY SAVINGS: Air recovery system for great energy efficiency.
- CARE DRY: The intelligent humidity sensor offers a precise control of the moisture in the linen. By this system the drying cycle will automatically stop when it reaches the set level of residual moisture.
- INSULATED PANELS & DOUBLE DOOR GLASS: The complete circuit of the air-flow has been thermally insulated in order to optimize the energy to heat the air and to maximize the energy efficiency. Double doorglass.
- OPTIMAL FLOW: The range of GOLD dryers complements the axial-radial air flow with side and front openings to increase and optimize the airflow circuit, achieving the most efficient drying conditions.
- SPRINKLER: Integrated Fire Extinguishing System.
- ELECTRONIC CONTROL: Easy and intuitive to use, the electronic control offers a complete control of the process.
- REVERSING DRUM: All models offer the reverse turning of the drum.
- STAINLESS STEEL DRUM standard.
- GENTLE DRY: The new drum with stamped holes makes sure the linen is gently handled.
- New filter drawer with wide surface and improved airflow.
- Cool Down: Anti-wrinkle at the end of cycle.
- Models available in electric, gas or steam heating.



OPTIONS

- Stainless steel body.
- Stainless steel front panel.
- Low pressure steam battery.
- Model versions in 60 Hz.
- Marine versions 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.



Air recyclé



Contrôle de l'humidité
et réglage automatique
du tambour



Carrosserie isolée



Double flux
Axial & Radial




Système
anti-Feu



Hublot
double vitrage

TECHNICAL DATA	UNIT.	DD28 GOLD	DD35 GOLD		
CAPACITY					
Capacity 1/18	Kg	31	37		
Capacity 1/20	Kg	27	33		
Hourly Output GOLD	Kg/h	72	86		
Evaporation capacity GOLD	l/h	44,6	44,6		
DRUM					
Ø Drum	mm	947	947		
Ø Door	mm	802	802		
Door center height	mm	1.040	1.040		
Load hole bottom height	mm	640	640		
Drum length	mm	780	936		
Drum volume	l	550	660		
POWER					
Drum motor power	Kw	0,55	0,55		
Fan Motor Power GOLD	Kw	0,75	0,75		
Total Installed power GOLD	Kw	31,35	37,35		
Electric Heating (Installed power)	Kw	30	36		
Gas heating (installed Power) in KW	Kw	41	41		
Gas heating (installed el. power) GOLD	Kw	1,35	1,35		
Steam heating (Steam Power KW)	Kw	50,1	50,1		
Steam heating (installed el. power) GOLD	Kw	1,35	1,35		
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V - I + T	N° x mm ² / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	N° x mm ² / A	4 x 35 / 100A	4 x 1,5 / 20A	4 x 50 / 125A	4 x 1,5 / 20A
Tension 400V - III + N + T	N° x mm ² / A	5 x 16 / 63A	5 x 1,5 / 20A	5 x 16 / 63A	5 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	1"		1"	
Ø Condensed (Steam models)	BSP	1"		1"	
DIMENSIONS / PACKING DIMENSIONS					
Width / Width	mm	985/1.065		985/1.065	
Depth / Depth	mm	1.054/1.154		1.210/1.310	
Height / Height	mm	1.946/2.080		1.946/2.080	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	230/260		260/285	
OTHERS					
Max airflow GOLD	m ³ /h	1.500		1.500	
Ø Fume exhaust	mm	200		200	
Sound level GOLD	dB	65		65	

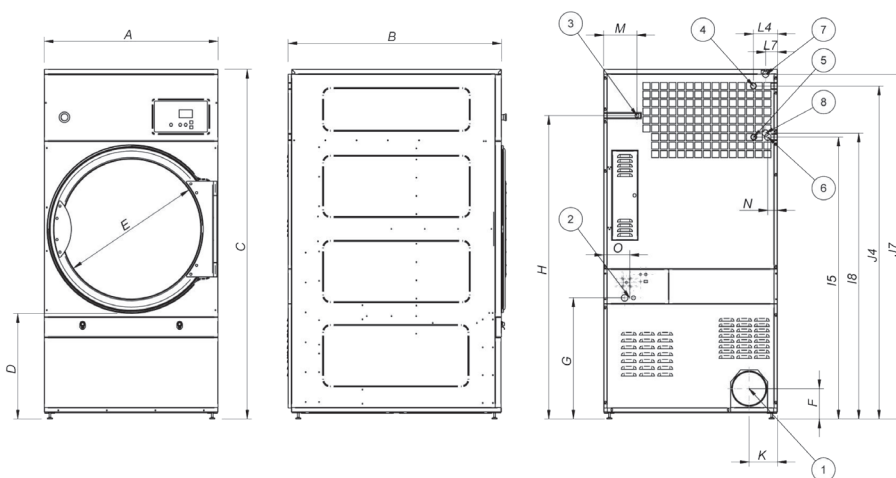

- 01. Fumes outlet
- 02. Electrical connection
- 03. Gas connection
- 04. Steam connection galva battery
- 05. Condensation outlet galva battery
- 06. Anti fire water valve
- 07. Steam connection stainless battery
- 08. Condensation outlet stainless battery

	A	B	C	D	E	F	G	H	I5	I8	J4	J7	K	L4	L7	M	N	O
DD28	985	1.054	1.946	577	802	172	685	1.715	1.594	-	1.883	-	160	134	-	188	55	148
DD35	985	1.210	1.946	577	802	172	685	1.715	1.594	1.616	1.883	1.948	160	134	67	188	55	690