

FLATWORK IRONER Ø 200 MM**MICRAII****FEATURES**

The MICRAII flatwork ironer is an economic model allowing an excellent finishing quality thanks to the feeding and ironing Nomex bands and a better output than a single wall ironer: it dries and irons right out of a high spin speed washer extractor to save time and energy.




- Front feeding and return of linen.
- Painted steel panels.
- Electric heating.
- Electronic control with selection of ironing speed and temperature.
- Roll Ø 200 mm in polished steel.
- Working width 1m40.
- Motor with speed inverter.
- Built-in cool down system.
- Feeding and ironing by Nomex belts for a better quality of ironing and durability.
- Double emergency stops: hands safety bar and front emergency push button.
- Heating protection by 2 thermostats.

OPTIONS

- Special voltages

TECHNICAL DATA	UNIT.	MICRA II
GENERAL DETAILS		
Theoretical production 45% humidity	Kg/h	12-14
Ø Roll	mm	200
Working width	mm	1.400
Height floor-feeding belts	mm	990
Working speed	mt/min	1-5
Electronic control	-	Yes
No. of ironing speeds	Nº	7
Length folder	Nº	No
POWER		
Heating power (electric model)	kW	10,5
Total electric power (electric model)	kW	10,84
Roll motor power	kW	0,25
Fan motor power	kW	0,09
DIMENSIONS / PACKAGING DIMENSIONS		
Width / Width	mm	1.878 / 2.100
Depth / Depth	mm	444 / 700
Height / Height	mm	1.335 / 1.570
Weight / Weight	Kg	180 / 220
Volume	m3	1.11 / 2.54
OTHERS		
No. Fume outlet	Nº	1
Ø Fume outlet	mm	56
Air flow	m3/h	300
Sound Level	dB	55

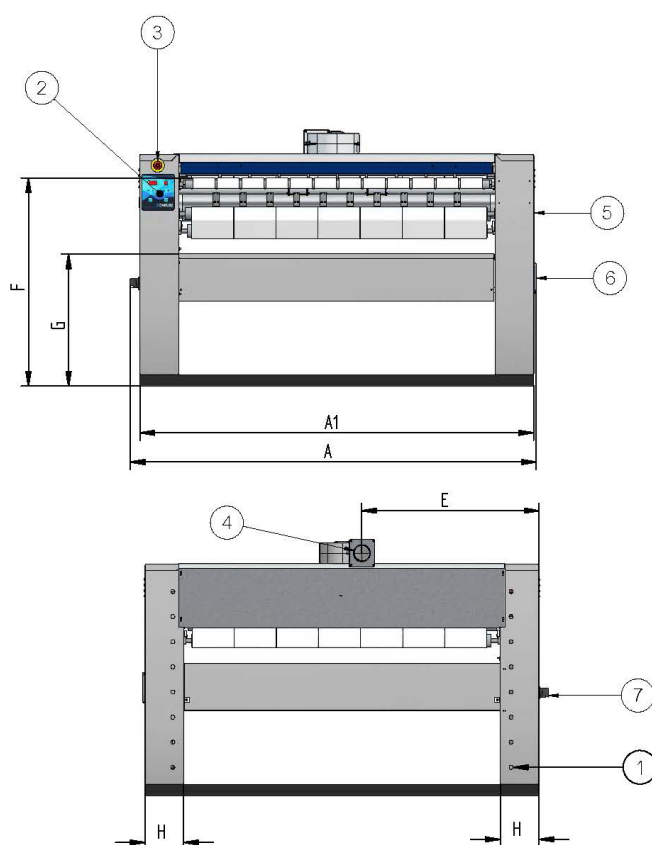

- 01. Electrical connection
- 02. Control panel
- 03. Emergency stop
- 04. Exhaust
- 05. Crank contactor
- 06. Crank
- 07. Main switch

	A	B	C	A1	B1	C1	D	E	F	G	H	I
MICRA II	1.885	448	1.335	1.878	444	1.110	Ø 83	1.020	1.000	635	-	-

www.danube-romania.ro
office@danube-romania.ro

