

## HIGH SPIN WASHERS EXTRACTORS

WED 45 ET2  
WED 60 ET2  
WED 120 ET2



### EASY TOUCH 2

- User friendly and fully programmable 7" screen,
- USB connection. PC software free of charge for programming, traceability, data analysis...
- Videos on display (ads, instructions...),
- 37 available languages,
- 8 dosing signals as standard.



### EFFICIENCY

- Intelligent weighing system,
- Low water consumption,
- Optimal loading: water and chemicals adapted to the load,
- Water recovery tanks ready with AQUABAC.



### G FORCE

- High G factor 450 (45 & 60 kg models)
  - High G factor 350 (120 kg model)
- Reduced residual moisture and drying time.



### VERSATILITY

- ELECTRIC <=> HOT WATER
- WET CLEANING features as standard.



### ERGONOMICS

- Big aluminium loading door (ø 560 mm for 45 & 60 kg models, ø 700 mm 120 kg model),
- Easy opening / closing system for door lock.



### CONNECTIVITY

- Remote communication ready as standard,
- Remote payment,
- Management of OPL laundries.



### EASY MAINTENANCE

- Same parts for all models: contactors, electronic devices, gear...
- Technical menu: statistics, alarms, traceability...



### OTHERS


- Grey skinplate outercasing,
- Drum and vat in AISI 304 stainless steel,
- Free standing: no need to be anchored to the floor,
- 3 water inlets,
- Detergent dispenser with 5 compartments,
- LOADING AID feature: water and rotation control,
- Imbalance electronic control with frequency inverter.



## OPTIONS

- Double drain kit for water recovery.
- Aqua Flow kit for water recycle.
- Tilting kit: single or double.
- Panel to cover feet (45 & 60 kg models).
- Water inlet hoses (45 & 60 kg models).
- Automatic weighing system on feet (includes 6 extra dosing signals kit).
- Relay card with 6 extra dosing signals: total of 14 signals.
- Steam kit to transform an electric or hot water heated machine into steam version.
- Dual heating electric / steam (45 & 60 kg models).
- Body or front panel in AISI 304 stainless steel (45 & 60 kg models).
- Printer
- Danube Online communication kit.
- "NC" normally closed drain valve (45 & 60 models).
- Reversing door opening (45 & 60 kg models)
- Tropicalized model
- Ship voltage for electric models: 440V III 50/60 Hz no neutral.

TECHNICAL DATA	UNIT.	WED45 ET2	WED60 ET2	WED120 ET2		
<b>DRUM</b>						
Load capacity 1:9 / 1:10	Kg	50/45	67/60	133/120		
Volume	l	450	600	1.200		
Diameter	mm	918	1.048	1.360		
Depth	mm	720	684	840		
<b>GENERAL DETAILS</b>						
Washing speed / Spining speed	r.p.m.	42,5/850	38/760	34/680		
G Factor	-	450	450	350		
Maximum force transmitted	KN	11,23 ±3,145	12,95 ±4,2	37,77 ±5,25		
Frequency-dynamic force	Hz	14,1	12,66	11,33		
Sound level	dB	<70	<70	<70		
Self-service version	-	No	No	No		
Double drain	-	Opt	Opt	Opt		
Weighing System / Tilting System	-	Opt	Opt	Opt		
<b>DOOR</b>						
Height center door / Height door	mm	1.190/830	1.190/830	1.330/900		
Diameter	mm	560	560	700		
<b>POWER</b>						
Motor	kW	7,5	11	15		
Heating (Electric model)	kW	28,8	36	-		
Max. power (Electric model)	kW	31,3	40	-		
Max. power (steam and hot water)	kW	7,5	11	15		
<b>CONNECTIONS</b>						
		<b>ELECTRICAL</b>	<b>STEAM / HOT WATER</b>	<b>ELECTRICAL</b>	<b>STEAM / HOT WATER</b>	<b>STEAM / HOT WATER</b>
Tension 230V - III + T	Nº x mm2 / A	3 x 25 / 80A	3 x 4 / 20A	3 x 25 / 100A	3 x 6 / 32A	3 x 10 / 40A
Tension 400V - III + N + T	Nº x mm2 / A	3 x 10 / 50A	3 x 2,5 / 10A	3 x 16 / 63A	3 x 4 / 10A	3 x 4 / 16A
Steam inlet (Steam mod.)	inch	3/4"		3/4"		1-1/4"
Maximum steam consumption (Steam mod.)	Kg/h	19		21		26,5
Water inlet	inch	1"		1"		1-1/2"
Water main pressure	Kgs/cm <sup>2</sup>	2-4		2-4		2-4
Maximum water consumption*	Lit/h	473*		633*		1.254*
Drain	mm/inch	3"		3"		3"
Drainage capacity	Lit/min	200		200		200
<b>DIMENSIONS / PACKING DIMENSIONS</b>						
Width / Width	mm	1.478/1.540		1.478/1.540		1.836/1.900
Depth / Depth	mm	1.444/1.580		1.444/1.580		1.836/1.940
Height / Height	mm	1.945/1.970		1.945/1.970		2.245/2.290
Net weight / Gross weight	kg	1.350/1.420		1.400/1.520		3.950/4.100

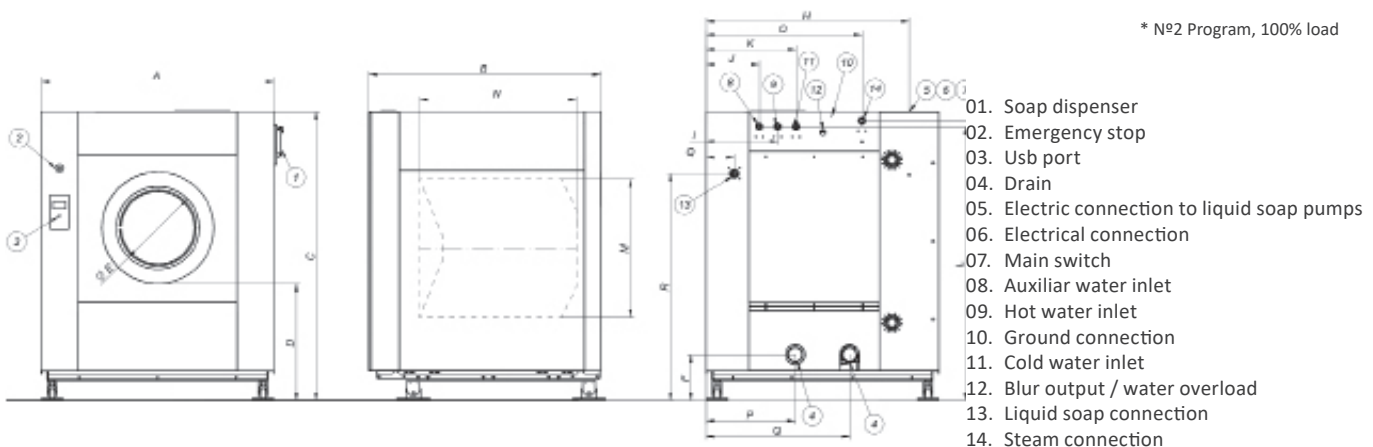

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
WED45	1.478	1.444	1.945	830	560	295	1.790	1.200	500	360	640	1.790	920	720	1.065	765	975	1.445
WED60	1.478	1.444	1.945	830	560	295	1.790	1.200	500	360	640	1.790	1.050	685	1.065	765	975	1.445
WED120	1.836	1.863	2.245	900	700	335	2.115	1.515	640	500	780	2.115	1.360	840	1.245	735	1.150	1.745