

## IRONING TABLES WITH SUCTION UNIT AND BOILER

TFC-DA  
TFC-A  
TFC-AS  
TFC-AVS

### FEATURES

#### TFC-DA

- Utility ironing table with electrically heated board and suction unit.
- Built-in electric steam boiler, water pump, water feeding tank and electric steam iron.
- Built-in suction unit controlled by foot pedal.
- Adjustable board temperature by thermostat.
- Pedals on both sides of the table.
- Electric boiler with water feeding and automatic steam production. Working pressure: 2,8 bar.
- Manual feeding of water tank.
- Voltage: 230 V | 50Hz

#### TFC-A / TFC-AS / TFC-AVS

- Utility ironing table with suction and electrically heated board, controlled by a thermostat.
- Built-in electric steam boiler.
- With standard board (1.200 x 400 x 250).
- Automatic water feeding.


### OPTIONS

- Swinging arm with suction and heated sleeve shape.
- Steam gun for: TFC-A / TFC-AS / TFC-AVS.
- Sliding trolley with light for: TFC-A / TFC-AS / TFC-AVS.
- Second iron (available only for models with boiler - TFC).

A - Vacuum  
V - Up steaming  
S - Blowing



TFC-DA

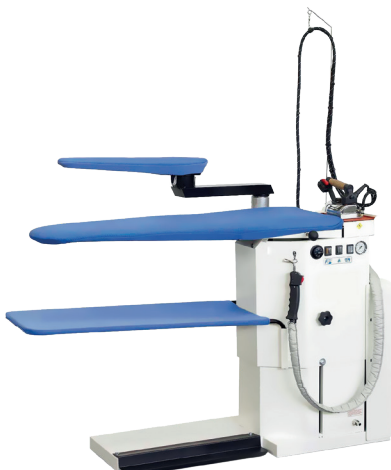

TFC-AS



TFC-AVS + TROLLEY

TECHNICAL DATA	UNIT.	TFC-DA	TFC-A	TFC-AS	TFC-AVS
<b>CAPACITY</b>					
Boiler	-	Yes	Yes	Yes	Yes
Boiler capacity	l	4	5	5	7
Board dimensions	mm	1.100 x 380 x 270	1.200 x 400 x 250	1.200 x 400 x 270	1.200 x 400 x 250
<b>OPTIONS</b>					
Swinging arm with suction and heated sleeve shape	-	Opt	Opt	Opt	Opt
Steam gun	-	No	Opt	Opt	Opt
Sliding trolley with balancer and lighting	-	No	Opt	Opt	Opt
Second steam iron assembly	-	No	Opt	Opt	Opt
<b>POWER</b>					
Vacuum Motor	kW	0,13	0,45	0,45	0,45
Pump Motor	kW	-	-	-	0,75
Iron Heater	kW	0,8	0,83	0,83	0,83
Board heater	kW	0,7	1	1	-
Boiler Heater	kW	1,45	3,9	3,9	6-7,5
Sleeve-arm heater (option)	kW	0,09	0,09	0,09	0,09
<b>CONNECTIONS</b>					
Ø Water inlet	BSP	-	3/8"	3/8"	3/8"
Ø Boiler exhaust (with boiler)	BSP	-	3/8"	3/8"	3/8"
Ø Steam inlet	BSP	-	-	-	-
Steam pressure	BAR	2,8	2,8	2,8	4,5
Steam Consumption	Kg/h	-	-	-	-
Ø Air inlet	BSP	-	-	-	1/4"
Air pressure	BAR	-	-	-	4-8
Air Consumption	NI/m	-	-	-	5
<b>DIMENSIONES / DIMENSIONES CON EMBALAJE</b>					
Width / Width	mm	1.380/1.300	1.550/1.520	1.500/1.520	1.680/1.880
Depth / Depth	mm	380/540	580/580	600/580	580/680
Height / Height	mm	930/1.160	950/1.120	1.800/1.120	920/1.270
Net weight / Gross weight	kg	43/57	87/103	105/121	141/165
Volume	m <sup>3</sup>	0,49/0,81	0,85/1,01	1,62/0,99	0,90/1,62
<b>OTHERS</b>					
Voltage	Hz	230V   50-60	230/400V III 50-60	230/400V III 50-60	230/400V III 50-60
Sound level	dB	70	68	70	75